

XLED 4019


Model: PR-8124

RoHS | CE | DMX | LED | 5m | IP20 | T_c55°C | T_a40°C

Version: 20241022

XLED 4019 is a LED fixture using 19 pcs of 40W RGBW LED as its light source and has the beam angle between 4° and 40°. Its beam is full and solid by imported ,high quality and high efficacy brand LEDs and linear zoom meets wash requirements at different places. It has options for dimmer speeds, curves and frequencies with linear color temperature (1800K - 10000K), smooth color temperature change and convenient advanced 89 color macros included in standard LEE color chart. It has optional smart color management system innovatively developed by us for precise and efficient color control. It is compact ,easy for transportation and installation, and suitable for all kinds of performing places.

Wash,RGBW, LED

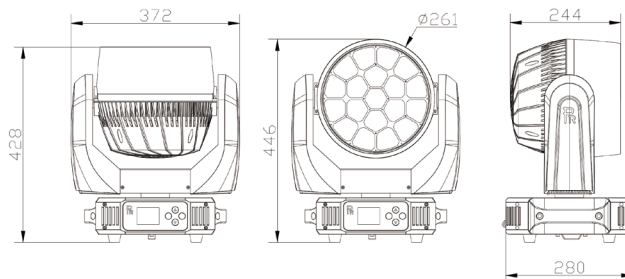

13.2Kg 
Size(mm)

Specifications

■ Input Voltages

100-240V AC, 50/60Hz

■ Power Consumption

900W @ 220V AC

■ Light Source

40W(RGBW IN ONE, 19pcs, 50000 hrs) Optional Ra ≥ 90

■ Head Movement

Pan: 540°(16 bit control) Tilt: 240°(16 bit control)

Pan and Tilt invertible and swappable with auto-positioning function

■ Colors

RGBWlinear color mixing with built-in macros

Color Temperature macros: optional 2700K、3000K、3500K、4000K、4500K、5000K、5700K

Color Macros: 89 color options included in standard color chart

■ Dimmer

Electronic dimmer, 0-100% linear(16Bit control)

3 dimmer speeds

5 dimmer curves

Dimmer frequency 1.2K~2.5K adjustable for high speed 4K video cameras

■ CTO

Color Temperature 1800K-10000K , linear control

■ Strobe

Electronic strobe , 0.3-25 F.P.S. , with built-in pulse strobe

■ Beam Angle

Beam Angle(1/2 peak) $\theta_{1/2}$: 4°~40°

Field Angle(1/10 Peak) $\theta_{1/10}$: 7°~60°

■ Fan Mode

Standard mode and theater modes. Theater mode is quiet mode

■ Control

International Standard DMX512 signal, 5 pin DMX512 interfaces

RDM protocol

24 channels in short mode,31channels in standard mode, and 41 channels in extended mode

Master/slave synchronized mode

Stand-alone mode, Preset mode, Single Scene mode

DMX 512 Wireless control

ArtNet and sACN(optional)

■ Other Functions

Color touch display, English/Chinese menus, Display auto-lock while standby to avoid unintended touch

Pan and Tilt speeds adjustable

Pan and Tilt invertible and swappable

Over temperature protection

Fixture time and DMX 512 channel value displayed

Software versions displayed, display invertible

Sensor diagnostic system

Intelligent fan cooling system

Input signal insulated

Firmware upgrade via DMX cable

Smart color management system(optional)

■ Housing

High temperature ABS, IP20

■ Working Temperature

Ambient temperature 45°C at maximum

■ Weight

Net weight: 13.2kg

■ Accessories

G clamp, 2 pcs

XLR Cable, 1 pc

Safety cord, 1 Pc

User manual, 1 set

■ Light Output

