


# XR 230 Beam

Model: PR-2207

RoHS | CE | RDMX | 230W | 18m | IP20 | T<sub>c</sub>80°C | T<sub>a</sub>40°C | 

Version: 20240122





XR 230 BEAM is an incredible fixture with high efficiency and luminance, having a color wheel (14 colors+open), 0-100% linear dimmer, a fixed gobo wheel (17 gobos + open) and an 8-facet prism, creating gorgeous beam with its beam angle at 3.6°.



Beam, 230W



Fixed gobos

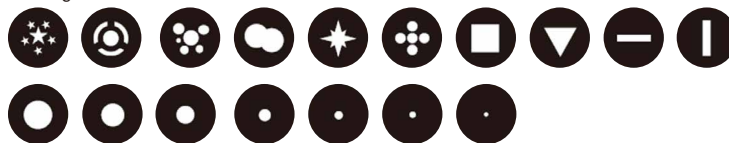

14.5Kg  
Size(mm)

## Specifications

- Input voltage  
200V~240V AC, 50/60Hz
- Input power  
350W@220V  
Power factor PF>0.90  
MAX. Current: 1.5A @ 220V
- Light Source  
Osram SIRIUS HRI 231W  
Color temperature 7900K  
Rated life 2000hrs, Energy save mode 2500hrs
- Colors  
1color wheel: 14colors+ Open  
rainbow effect with bi-directional and variable speeds,  
Stepping/linear color changing
- Gobos  
1 fixed gobo wheel: 17gobos+open  
bi-directionally rotatable, and shakable at variable speeds
- Prism/Frost  
1 8-facet prism(bi-directional rotation with variable  
speeds)+frost filter+open  
3-24 facet prism (Optional)
- Focus  
DMX linear focus
- Dimmer/Strobe  
0-100% linearly adjustable/Double shutter blades,  
0.3~25 F.P.S
- Head Movement  
Pan 540°, Tilt 270° with 16 bit control
- Beam Angle  
0°~3.6°
- Operation Temperature  
Maximum ambient temperature 40°C
- Control  
International standard DMX 512 protocol, 5-pin interface  
13channels in short mode ,14channels in standard mode  
and 16channels in extended mode  
Adjusting mode
- Other Functions  
Adjustable Pan & Tilt speed  
Lamp' s and fixture' s hours displayed  
Modular Structure for easy maintenance  
DMX512 wireless reciever  
Optional DMX512 Transmitter
- Housing  
High temperature ABS, IP20
- Weight  
14.5 kg
- Accessories  
G clamp, 2 pcs  
XLR connectors, 1set (male and female)  
safety cord, 1 pc  
user manual, 1 pc  
Optional omega clamp, 2 pcs

## ■ Light Output

